



RS Global

ISSN 2413-1032



WORLD SCIENCE

Multidisciplinary Scientific Edition



RS Global

WORLD SCIENCE

No 7(35)
Vol.5, July 2018

DOI: https://doi.org/10.31435/rsglobal_ws

Copies may be made only from legally acquired originals.

A single copy of one article per issue may be downloaded for personal use (non-commercial research or private study). Downloading or printing multiple copies is not permitted. Electronic Storage or Usage Permission of the Publisher is required to store or use electronically any material contained in this work, including any chapter or part of a chapter. Permission of the Publisher is required for all other derivative works, including compilations and translations. Except as outlined above, no part of this work may be reproduced, stored in a retrieval system or transmitted in any form or by any means without prior written permission of the Publisher.

Publisher –
RS Global Sp. z O.O.,

Scientific Educational Center
Warsaw, Poland

Numer KRS: 0000672864
REGON: 367026200
NIP: 5213776394

Publisher Office's address:

Dolna 17, lok. A_02
Warsaw, Poland,
00-773

Website: <https://ws-conference.com/>

E-mail: rsglobal.poland@gmail.com

Tel: +4(857) 898 55 10

The authors are fully responsible for the facts mentioned in the articles. The opinions of the authors may not always coincide with the editorial boards point of view and impose no obligations on it.

CHIEF EDITOR

Laputyn Roman PhD in transport systems, Associate Professor, Department of Transport Systems and Road Safety, National Transport University, Ukraine

EDITORIAL BOARD:

Nobanee Haitham Associate Professor of Finance, Abu Dhabi University, United Arab Emirates

Almazari Ahmad Professor in Financial Management, King Saud University-Kingdom of Saudi Arabia, Saudi Arabia

Lina Anastassova Full Professor in Marketing, Burgas Free University, Bulgaria

Mikiashvili Nino Professor in Econometrics and Macroeconomics, Ivane Javakishvili Tbilisi State University, Georgia

Alkhawaldeh Abdullah Professor in Financial Philosophy, Hashemite University, Jordan

Mendebaev Toktamys Doctor of Technical Sciences, Professor, LLP "Scientific innovation center "Almas", Kazakhstan

Yakovenko Nataliya Professor, Doctor of Geography, Ivanovo State University, Shuya

Mazbayev Ordenbek Doctor of Geographical Sciences, Professor of Tourism, Eurasian National University named after L.N.Gumilev, Kazakhstan

Sentyabrev Nikolay Professor, Doctor of Sciences, Volgograd State Academy of Physical Education, Russia

Ustenova Gulbaram Director of Education Department of the Pharmacy, Doctor of Pharmaceutical Science, Kazakh National Medical University name of Asfendiyarov, Kazakhstan

Harlamova Julia Professor, Moscow State University of Railway Transport, Russia

Kalinina Irina Professor of Chair of Medicobiological Bases of Physical Culture and Sport, Dr. Sci.Biol., FGBOU VPO Sibirsky State University of Physical Culture and Sport, Russia

Imangazinov Sagit Director, Ph.D, Pavlodar affiliated branch "SMU of Semei city", Kazakhstan

Dukhanina Irina Professor of Finance and Investment Chair, Doctor of Sciences, Moscow State Medical Dental University by A. I. Evdokimov of the Ministry of health of the Russian Federation, Russian Federation

Orehowskyi Wadym Head of the Department of Social and Human Sciences, Economics and Law, Doctor of Historical Sciences, Chernivtsi Trade-Economic Institute Kyiv National Trade and Economic University, Ukraine

Peshcherov Georgy Professor, Moscow State Regional University, Russia

Mustafin Muafik Professor, Doctor of Veterinary Science, Kostanay State University named after A. Baitursynov

Ovsyanik Olga Professor, Doctor of Psychological Science, Moscow State Regional University, Russian Federation

Kuzmenkov Sergey Professor at the Department of Physics and Didactics of Physics, Candidate of Physico-mathematical Sciences, Doctor of Pedagogic Sciences, Kherson State University

Safarov Mahmatali Doctor Technical Science, Professor Academician Academia Science Republic of Tajikistan, National Studies University "Moscow Power Institute" in Dushanbe

Omarova Vera Professor, Ph.D., Pavlodar State Pedagogical Institute, Kazakhstan

Koziar Mykola Head of the Department, Doctor of Pedagogical Sciences, National University of Water Management and Nature Resources Use, Ukraine

Tatarintseva Nina Professor, Southern Federal University, Russia

Sidorovich Marina Candidate of Biological Sciences, Doctor of Pedagogical Sciences, Full Professor, Kherson State University

Polyakova Victoria Candidate of Pedagogical Sciences, Vladimir Regional Institute for Educational Development name L. I. Novikova, Russia

Issakova Sabira Professor, Doctor of Philology, The Aktyubinsk regional state university of K. Zhubanov, Kazakhstan

Kolesnikova Galina Professor, Taganrog Institute of Management and Economics, Russia

Utebaliyeva Gulnara Doctor of Philological Science, Al-Farabi Kazakh National University, Kazakhstan

Uzilevsky Gennady Dr. of Science, Ph.D., Russian Academy of National Economy under the President of the Russian Federation, Russian Federation

Krokhmal Nataliia Professor, Ph.D. in Philosophy, National Pedagogical Dragomanov University, Ukraine

Chorny Oleksii D.Sc. (Eng.), Professor, Kremenchuk Mykhailo Ostrohradskyi National University

Pilipenko Oleg Head of Machine Design Fundamentals Department, Doctor of Technical Sciences, Chernigiv National Technological University, Ukraine

Nyyazbekova Kulanda Candidate of pedagogical sciences, Kazakhstan

Cheshmedzhieva Margarita Doctor of Law, South-West University "Neofit Rilski", Bulgaria

Svetlana Peneva MD, dental prosthetics, Medical University - Varna, Bulgaria

Rossikhin Vasilij Full dr., Doctor of Legal Sciences, National Law University named after Yaroslav the Wise, Ukraine

Pikhtirova Alina PhD in Veterinary science, Sumy national agrarian university, Ukraine

Temirbekova Sulukhan Dr. Sc. of Biology, Professor, Federal State Scientific Institution All-Russia Selection-Technological Institute of Horticulture and Nursery, Russian Federation

CONTENTS

TRANSPORT

- Марунич В. С., Харута В. С., Данильченко Ю. С.,
Таран О. О., Ткачук А. С., Соломаха Ю. В.*
ПАСАЖИРСЬКІ ПЕРЕВЕЗЕННЯ: ЛОГІСТИЧНО-ІНФРАСТРУКТУРНІ АСПЕКТИ..... 4

ENGINEERING SCIENCES

- Софийский К. К., Стасевич Р. К., Агаев Р. А., Власенко В. В., Дудля Е. Е.*
МАТЕМАТИЧЕСКОЕ ОБЕСПЕЧЕНИЕ БЕЗАВАРИЙНОЙ РАБОТЫ ПАРОТУРБИНОЙ
КОГЕНЕРАЦИИ..... 13
- Стрежекур Э. Е., Проценко А. В., Пабат А. И., Мусиенко К. А., Ревак Е. А.*
АККУМУЛЯТОР НА ОСНОВЕ ZR +PB КАК АЛЬТЕРНАТИВНЫЙ ИСТОЧНИК
ПИТАНИЯ..... 21
- Ащепкова Н. С., Богданов В. А., Ащепков С. А.*
ДИНАМИКА МОДЕЛИ ДВУХКОЛЕСНОГО ТРАНСПОРТНОГО РОБОТА 26
- Ковтун С. І., Іванов С. О., Декуша Л. В., Декуша О. Л., Воробйов Л. Й.*
ЗАСОБИ ВИМІРЮВАННЯ РАДІАЦІЙНОГО ТЕПЛООБМІНУ ТА ІНСОЛЯЦІЇ..... 31
- Михалків Д. В.*
ЕКСПЕРИМЕНТАЛЬНЕ ДОСЛІДЖЕННЯ ЗМІНИ ТЕМПЕРАТУРНИХ УМОВ В
ПРИМІЩЕННІ ПРИ ПЕРЕРИВЧАСТОМУ ОПАЛЕННІ ЕЛЕКТРИЧНИМИ
КОНВЕКТОРАМИ..... 39
- Паилодзе Н. О., Вадачкорія З. А., Абесадзе Н. М.*
ОПРЕДЕЛЕНИЕ ОСНОВНЫХ ХАРАКТЕРИСТИК ТРИКОТАЖНЫХ ФИЛЬТРОВ ДЛЯ
КАРДИОТОМИЧЕСКОГО РЕЗЕРВУАРА – РЕИНФУЗОРА 46
- Ivitski I. I.*
INJECTION MOLDING OF INTELLECTUAL POLYMER MATERIALS..... 49
- Mushtruk M., Vasylyv V., Mukoid R., Boiko P., Bondar M.*
FEATURES OF BIODIESEL PRODUCTION FROM WASTE OILS AND TECHNICAL
ANIMAL FATS..... 52
- Tabatadze L. V., Shvelidze V. V.*
USE OF TECHNOLOGIES OF OZONE IN MANUFACTURE OF FOOD PRODUCTS 58

FEATURES OF BIODIESEL PRODUCTION FROM WASTE OILS AND TECHNICAL ANIMAL FATS

¹Mushtruk M., assoc. prof., PhD

¹Vasylyv V., assoc. prof., PhD

²Mukoid R., assoc. prof., PhD

²Boiko P., assoc. prof., PhD

²Bondar M., assoc. prof., PhD

¹ Kyiv, Ukraine, National University Life and Environmental Sciences of Ukraine

² Kyiv, Ukraine, National University of Food Technologies

DOI: https://doi.org/10.31435/rsglobal_ws/12072018/6042

ARTICLE INFO

Received: 11 May 2018

Accepted: 26 June 2018

Published: 12 July 2018

KEYWORDS

feedstock oil;
waste cooking oil;
alternative energy;
biodiesel production;
esterification process,
transesterification process.

ABSTRACT

Biodiesel (fatty acid methyl esters), which is derived from triglycerides by transesterification with methanol, has attracted considerable attention during the past decade as a renewable, biodegradable, and nontoxic fuel. Several processes for biodiesel fuel production have been developed, among which transesterification using alkali-catalysis gives high levels of conversion of triglycerides to their corresponding methyl esters in short reaction times. This process has therefore been widely utilized for biodiesel fuel production in a number of countries.

The characteristics of biodiesel have made the pursuit of high quality biodiesel production attractive. Utilization of waste cooking oil is a key component in reducing biodiesel production costs up to 60–90%. Researchers have used various types of homogeneous and heterogeneous catalyzed transesterification reaction for biodiesel production. The main hurdle to the commercialization of this system is the cost of lipase production. As a means of reducing the cost, the use of whole cell biocatalysts immobilized within biomass support particles is significantly advantageous since immobilization can be achieved spontaneously during batch cultivation, and in addition, no purification is necessary. Consequently, the study of the transformation of waste of vegetable and animal fats is promising and has great potential for industrial application.

Citation: Mushtruk M., Vasylyv V., Mukoid R., Boiko P., Bondar M. (2018) Features of Biodiesel Production from Waste Oils and Technical Animal Fats. *World Science*. 7(35), Vol.5. doi: 10.31435/rsglobal_ws/12072018/6042

Copyright: © 2018 Mushtruk M., Vasylyv V., Mukoid R., Boiko P., Bondar M. This is an open-access article distributed under the terms of the **Creative Commons Attribution License (CC BY)**. The use, distribution or reproduction in other forums is permitted, provided the original author(s) or licensor are credited and that the original publication in this journal is cited, in accordance with accepted academic practice. No use, distribution or reproduction is permitted which does not comply with these terms.

Introduction. Waste cooking oil has always been an environment problem in food factories. Converting the feedstock oil into biodiesel will reduce this problem. This project will not only save environment but also cost.

Literature review. Biodiesel is an alternative diesel fuel derived from vegetable oils or animal fats. The main components of vegetable oils and animal fats are triglycerides or also known as ester of fatty acid attached to glycerol. One of the main driving force for biodiesel widespread is the greenhouse gas emission (CO₂ being the major one). The term feedstock oil refers to vegetable oil has been in food production and which is no longer viable for its intended use. Feedstock oil arises from many different sources, including domestic, commercial and industrial. Feedstock oil is a potentially problematic waste stream which requires proper management. The disposal of feedstock oil can be problematic when disposed incorrectly.

Any fatty acid sources may be used to produce biodiesel. Therefore, any animal or plant lipid should be ready substrate for the production of biodiesel. The use of edible vegetable oils and animal fats for biodiesel production has recently been of great concern because they compete with food

material- the food versus fuel dispute. There are concern that biodiesel feedstock may compete with food supply in the long term. From an economic point of view; the production of biodiesel is very feedstock sensitive. The cost of feedstock accounted for 88% of total estimated production cost. In all cases, more than 80% of the production cost is associated with the feedstock, such as recycled cooking oils. Reusing of these waste greases not only reduce the burden of the government in disposing the waste, maintaining public sewers, and treating the oily wastewater, but also lower the production cost of biodiesel significantly.

This project is aimed to develop a simple small plant to process the waste cooking oil to biodiesel and use it in the factory [1, 2-6].

Feedstock Waste Cooking Oil. Biodiesel can be produced from any material that contains fatty acids, be they linked to other molecules or present as free fatty acids. Thus various vegetable fats and oils, animal fats, waste greases, and edible oil processing wastes can be used as feed stocks for biodiesel production. The choice of feedstock is based on such variables as local availability, cost, government support and performance as a fuel. The primary feedstock is a vegetable oil or animal fat, biodiesel is generally considered to be renewable. Since the carbon in the oil or fat originated mostly from carbon dioxide in the air, biodiesel is considered to contribute much less to global warming than fossil fuels. Diesel engines operated on biodiesel have lower emissions of carbon monoxide, unburned hydrocarbons, particulate matter, and air toxics than when operated on petroleum-based diesel fuel [3].

Biodiesel from waste cooking oil (feedstock oil) can reduce the cost of biodiesel production since the feedstock costs constitutes approximately 70-95% of the overall cost of biodiesel production [6]. Although biodiesel cannot entirely replace petroleum-based diesel fuel, there are at least five reasons that justify its development.

- It provides a market for excess production of vegetable oils and animal fats.
- It decreases, although will not eliminate, the country's dependence on imported petroleum.
- Biodiesel is renewable and does not contribute to global warming due to its closed carbon cycle. A life cycle analysis of biodiesel showed that overall CO₂ emissions were reduced by 78 % compared with petroleum-based diesel fuel [7].

- The exhaust emissions of carbon monoxide, unburned hydrocarbons, and particulate emissions from biodiesel are lower than with regular diesel fuel. Unfortunately, most emissions tests have shown a slight increase in oxides of nitrogen (NO_x). When added to regular diesel fuel in an amount equal to 1–2%, it can convert fuel with poor lubricating properties, such as modern ultra-low-sulfur diesel fuel, into an acceptable fuel.

Methodology. Fig. 1 describes the steps, processes and methods used to produce biodiesel product. This process started from free fatty acid to determine acid value and step of process. Second process is drying to remove water in FAME and last process is properties physical to determine contents of FAME.

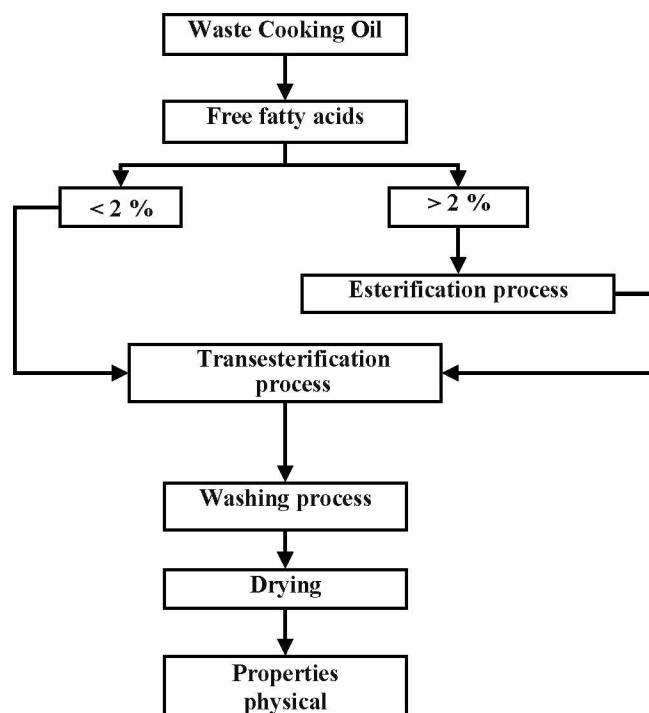


Fig. 1. Flow Chart to Produce Biodiesel from feedstock oil

Feedstock Waste Cooking Oil. Based on Fig. 1 it is recognized that the production of waste cooking oil will be the function of the frying temperature and length of use as well as the material used for frying. In this experiment, feedstock oil were collected from a local Factory, which produced chip cracker as well as continental foods.

The used oil sample was taken from the fryer which is used for frying potatoes and other vegetables based food items. Twenty-five liters of oil samples were collected from a collecting drum in which the waste cooking oil was collect once in every days for approximately 1 weeks. The oil sample is assumed to be representative as it is collected from the oil stored for 8-10 weeks from several batches of waste oil. The temperature observed during frying was in the range of 130°C to 175°C. This temperature is comparable with the temperature (140°C-180°C) for preparing French fries [8-15]. However, it was found difficult to read the temperature in boiling oil which gives approximately 5-10% error. Depending on the quantity of food used for frying, the oil was discarded sometimes at the end of each day and sometimes once in two or three days.

Free Fatty Acids. Flow chart in Fig. 1 shows the relation between FFA and process. Which FFA less than 2 %, the process can directly to transesterification process and while FFA more than 2% it need to start from esterification process to reduce FFA. The acid value of the waste cooking oil was determined in order to estimate the free fatty acid content and give an idea of how much acid catalyst and methanol would be needed to push the acid esterification chemical towards methyl ester production. In earlier published research it was recommended that 0.5 - 1.5% (based on the weight of free fatty acid in the oil) of pure (95-98%) sulphuric acid should be used as a catalyst. Acid value titration method was used according to BP monograph [9-18].

Processing in Biodiesel. Biodiesel has two main stage process is esterification and transesterification process. Separation was used to separate two layer between catalyze and oil. Washing process to produce the neutral biodiesel and remove catalyzes glycerol, soap and methanol.

1) *Esterification.* Based on flow chart in Fig. 1 esterification is one of process in biodiesel. It work to reduce FFA if FFA more than 2%. An acid-catalyzed esterification process before the base-catalyzed transesterification process will eliminate most of the free fatty acids from the vegetable oil. Sulphuric acid (95 – 98%) is used by 1% in esterification process depend from waste cooking. In these experiments the sulphuric acid was first mixed with methanol before adding to the waste cooking oil. After adding the methanol/sulphuric acid and waste cooking oil the agitator speed were used to mix the solvents until they became murky. This was then heated to about 60° C for 2 hours. A higher temperature or a faster stirring rate may push the acidic esterification equation to convert free fatty acid to methyl ester.

2) *Separation 1.* Separation needed 3 hour to get the top methanol and bottom oil layers of the biodiesel. Two layers could clearly be seen in the successful basic esterification biodiesel. The top layer was mainly methanol. The bottom layer was mainly triglyceride product esterification after remove the water. These processes to reduce free fatty acid until below 2%. The density of the methanol is less than the bottom triglyceride.

3) *Transesterification.* Transesterification process work as to reduce viscosity in biodiesel. This process can be directly if FFA less than 2% show in fig. 1. Sodium hydroxide was used as catalyst in this process. The amount of catalyst had an impact in the conversion of esters during the transesterification process. The reaction was carried out using 1% of catalyst concentration. Before transesterification process Sodium hydroxide was first mixed with methanol together in one container before adding to the waste cooking oil. After adding the methanol / sodium hydroxide and waste cooking oil the agitator speed were used to mix the solvents until they became murky. This was then heated to about 60° C for 2 hours.

4) *Separation 2.* Transesterification process and any methanol evaporation the resultant biodiesels were left to lie for at least 8 hours. Separations were used to separate the top (methyl ester) and bottom (glycerol) layers of the biodiesel samples. Two layers could clearly be seen in the successful basic transesterification biodiesel samples. The top layer was mainly composed of free fatty acid methyl esters. The bottom deposit was mostly made up of glycerol, salts, soap, other impurities and excess methanol as it is a very polar compound i.e. it partitions more with polar glycerol as opposed to the non-polar methyl esters.

5) *Washing.* The top methyl ester layer was separated and removed from every production sample. The water washing process was then used on some of the biodiesel batches. Once separated from the glycerin the biodiesel is sometimes purified by washing gently with warm water to remove residual catalyst or soaps, dried, and sent to storage. In some processes this step is unnecessary. This is normally the end of the production process resulting in a clear amber-yellow liquid with a viscosity

similar to petro diesel. In some systems the biodiesel is distilled in an additional step to remove small amounts of color bodies to produce a colorless biodiesel.

Result and discussion. *Esterification Process.* Fig. 2 shows the separation between methanol and triglycerin:

- At the top will be presence methanol and at the bottom show triglycerin;
- involves the reaction of alcohol (such as methanol) with fatty acids as catalyzed to reduce the levels of FFA in the low-cost feedstocks to an acceptable range;
- reaction between acids and alcohols in the presence of strong acid catalyst;
- produce ester and water free fatty acid of material must be less than 2 %.



Fig. 2. Esterification process results

It needs to use methanol and Sodium Hydroxide as catalyst (fig. 3) show two layer separation between glycerol and FAME:

- at the top will be presence FAME and the at bottom is glycerol;
- reduce the high viscosity of triglyceride (TG);
- methanol and catalyst produce methyl ester and glycerol involves the reaction of alcohol (methanol) with oil.

Transesterification Process



Fig. 3. Transesterification process result

Washing & Distillation Process

Fig. 4 shows separation between water and FAME.

- To remove small amounts of colour bodies to produce a colourless biodiesel it need washing many time



Fig. 4. Washing and distillation process

Biodiesel

- To obtain pure methyl esters (Biodiesel/ FAME)
- To remove soap, catalyst, methanol and other pollutants of biodiesel, using water
- If the washing is not complete, it will be repeated by esterification and transesterification or washing.



Fig. 5. Biodiesel and feedstock oil

- Biodiesel can show in fig. 5 which left is raw material and right is biodiesel.
- The percentage of biodiesel around 68-70% can be produce.
- Increase in the molar ratio the conversion of feedstock oil to FAME decrease.
- At the same time, the waste can be converted to useable energy, pollution due to waste cooking oil can be avoided, and energy can be continuously saved and renewed.

Drying. After washing water still have inside biodiesel. Fig. 6 show oven for drying biodiesel. Then the water must be removed from the biodiesel using drying at 120 °C for 24 hour.

Physical Properties. Properties are one of method to determine the standard of biodiesel. Biodiesel can check using density, viscosity, flash point, acid value and water content.

Equipment for testing kinematic viscosity and Standard method for kinematic viscosity is Kinematic viscosity DSTU 6081:2009, 40 °C, requirement: 1.9 – 6.0 mm²/s. Kinematic viscosity: “the resistance to flow of a fluid under gravity”. The kinematic viscosity is equal to the dynamic viscosity/density the kinematic viscosity is a basic design specification for the fuel injectors used in diesel engines. Too high a viscosity and the injectors do not perform properly. Dynamic viscosity – ‘ratio between applied shear stress and rate of shear of a liquid.’ Density – “the mass per unit volume of a substance at a given temperature.” The viscosity of biodiesel can be predicted ± 15 % using the esters composition determined using DSTU 6081:2009. The viscosity apparatus to run D 445 is not critical to the QC laboratory, but it is valuable as a quick assay method for estimating the degree of completion for a reaction batch [18-20].

Equipment for testing combustion in biodiesel using method DSTU 6081:2009 - Flash point, closed cup, requirement 130 °C min. The flash point is defined as the “lowest temperature corrected to a barometric pressure of 101.3kPa (760 mm Hg), at which application of an ignition source causes the vapors of a specimen to ignite under specified conditions of test.”

Testing for acid value using method DSTU 6081:2009 – Acid number, requirement 0.80 mg KOH/g. The acid number is “The quantity of base, expressed as milligrams of potassium hydroxide per gram of sample, required to titrate a sample to a specified end point.” The acid number is a direct measure of free fatty acids in B100. The free fatty acids can lead to corrosion and may be a symptom of water in the fuel. Usually, for a base catalyzed process, the acid value after production will be low since the base catalyst will strip the available free fatty acids. However, the acid value may increase with time as the fuel degrades due to contact with air or water. This test should be performed regularly as a part of the producer QC program.

This testing is very important in biodiesel. Before biodiesel are use in the engine water content must be follow the standard to avoid damage. The standard EN 14214 method D2709 is max 0.005%.

Conclusions. The biodiesel was prepared from waste cooking oil sample collected from a local factory in Malaysia. The biodiesel was characterized for its physical and fuel properties using ASTM standard methods for biodiesel fuel quality assurance The composition of final biodiesel was determined by physical properties such as density, viscosity, flash point, water content and acid value. From the tests, the flash point was found to be 97°C, water and sediment was 0.02%, total acid number was 0.29 mgKOH/g, viscosity at 40°C was 4.2 mm²/sec and density 0.82g/cm. Out of 5 properties tested, all of them met the DSTU criteria for fuel standard. Production of biodiesel from waste cooking oils for diesel substitute is particularly important because the increasing cost of oil extracted from petroleum source and also it is good for enviroment. Waste cooking oil can be an important source for biodiesel production in Malaysia it is ready available and environment.

REFERENCES

1. Муштрук, М. М. (2016). Виробництво дизельного біопалива з відпрацьованих олій. *Научные труды SWorld*, 2(1), 11-14.
2. Сухенко, Ю. Г., Литвиненко, О. А., Сухенко, В. Ю., Муштрук, М. М., & Бойко, Ю. І. (2012). Використання гідродинамічної кавітації у виробництві дизельного біопалива.
3. Mushtruk M., Suxenko J., Suxenko V. Intensifikacija processa preobrazovanija zhirov v dizel'noe biotoplivo //Motrol. Motorizacija i Energetyka Rolnictwa. – 2012. – Т. 14. – №. 3.
4. Сухенко Ю. Г., Муштрук М. М., Поліченко Д. Т. Сучасні технології і обладнання для синтезу дизельного біопалива //Научные труды SWorld. – 2015. – Т. 5. – №. 2. – С. 13-17.
5. Sukhenko Y. G., Mushtruk M. M. Biodiesel production from vegetable oils //Научные труды SWorld. – 2015. – Т. 2. – №. 3. – С. 38-41.
6. Муштрук М. М. Виробництво дизельного біопалива та оцінка якісних показників //Научные труды SWorld. – 2016. – Т. 2. – №. 1. – С. 14-18.
7. Сухенко Ю. Г., Муштрук М. М. Способи виробництва дизельного біопалива //Мир науки и инноваций. – 2016. – Т. 2. – №. 1. – С. 19-21.
8. Mushtruk M. M., Sukhenko Y. G., Sukhenko V. Y. Mathematical modeling transformation fats in diesel biofuel //Науковий вісник НУБіП України. Серія: Техніка та енергетика АПК. – 2012. – №. 170-1. – С. 203-211.
9. Сухенко Ю. Г., Муштрук М. М. Вплив концентрації метанолу на швидкість перетворення жирівмісної сировини у дизельне біопаливо //Мир науки и инноваций. – 2016. – Т. 2. – №. 1. – С. 32-34.
10. Сухенко Ю. Г., Муштрук М. М. Вплив вільних жирних кислот і води на ступінь перетворення жирів в рідке біопаливо //Мир науки и инноваций. – 2016. – Т. 2. – №. 1. – С. 25-28.
11. Сухенко Ю. Г., Муштрук М. М., Остапишен М. Б. Каталітичні системи для виробництва рідкого біопалива з рослинних і тваринних жирів //Научные труды SWorld. – 2015. – Т. 5. – №. 2. – С. 9-13.
12. Муштрук М., Сухенко Ю., Сухенко В. Дизельне біопаливо з жирівмісних відходів птахопереробних підприємств //Техніка і технології АПК. – 2013. – №. 10. – С. 34-36.
13. Sukhenko Y. G., Mushtruk M. M., Topalov V. V. Biodiesel Production Based on Waste Cooking Oil //Научные труды SWorld. – 2015. – Т. 5. – №. 2. – С. 21-28.
14. Муштрук М., Сухенко Ю., Сухенко В. Відходи харчових і переробних виробництв АПК–джерело біопалива //Продовольча індустрія АПК. – 2014. – №. 1. – С. 10-14.
15. Муштрук М. М. Виробництво дизельного біопалива з жирівмісних відходів методом переестерифікації етанолом //Научные труды SWorld. – 2016. – Т. 2. – №. 1. – С. 22-27
16. Муштрук, М.М. Виробництво дизельного біопалива з технічних тваринних жирів [Текст] / М.М. Муштрук, Ю.Г. Сухенко, В.Ю Сухенко // Техніка і технології АПК. — 2013. — №. 4 (43) – С. 17 – 20.
17. Сухенко Ю.Г. Биотопливо из отходов предприятий ресторанного хозяйства/ Ю.Г. Сухенко, М.М.Муштрук, О.В. Глоба // Научные труды SWorld. 2015. Т. 5. № 2 (39). С. 17-21.
18. Муштрук, М. М. Обґрунтування характеристик обладнання для виробництва рідкого біопалива з технічних тваринних жирів [Текст]: дис. ... канд. техн. наук / М. М. Муштрук. — К., 2014. – 234 с
19. Муштрук М. М., Муштрук Н. М. Исследование процесса производства дизельного биотоплива из растительных масел и животных жиров //Актуальные научные исследования в современном мире. – 2017. – №. 10-1-1. – С. 37-42.
20. Муштрук М. М. Виробництво рідких Біопалив з використанням кавтаційного реактора //Научные труды SWorld. – 2016. – Т. 2. – №. 1. – С. 27-30.


WORLD SCIENCE

DOI: https://doi.org/10.31435/rsglobal_ws

№ 7(35)
Vol.5, July 2018

MULTIDISCIPLINARY SCIENTIFIC EDITION

Indexed by:



Passed for printing 07.07.2018. Appearance 12.07.2018.

Typeface Times New Roman.

Circulation 300 copies.

RS Global Sp. z O.O., Warsaw, Poland, 2018