

ISSN 2313–5891 (Online)  
ISSN 2304–974X (Print)

# **Ukrainian Food Journal**

***Volume 7, Issue 4***  
**2018**

**Kyiv**

**2018**

**Київ**

**Ukrainian Food Journal** is an international scientific journal that publishes innovative papers of the experts in the fields of food science, engineering and technology, chemistry, economics and management.

**Ukrainian Food Journal** – міжнародне наукове періодичне видання для публікації результатів досліджень фахівців у галузі харчової науки, техніки та технології, хімії, економіки і управління.

**Ukrainian Food Journal** is abstracted and indexed by scientometric databases:

**Ukrainian Food Journal** індексується наукометричними базами:

Index Copernicus (2012)  
EBSCO (2013)  
Google Scholar (2013)  
UlrichsWeb (2013)  
CABI full text (2014)  
Online Library of University of Southern Denmark (2014)  
Directory of Research Journals Indexing (DRJI) (2014)  
Directory of Open Access scholarly Resources (ROAD) (2014)  
European Reference Index for the Humanities and the Social Sciences (ERIH PLUS) (2014)  
Directory of Open Access Journals (DOAJ) (2015)  
InfoBase Index (2015)  
Chemical Abstracts Service Source Index (CASSI) (2016)  
FSTA (Food Science and Technology Abstracts) (2018)  
Emerging Sources Citation Index (2018)

**Ukrainian Food Journal** включено у перелік наукових фахових видань України з технічних наук (Наказ Міністерства освіти і науки України № 1609 від 21.11.2013)

**Editorial office address:**

National University  
of Food Technologies  
Volodymyrska str., 68  
Ukraine, Kyiv 01601

**Адреса редакції:**

Національний університет  
харчових технологій  
вул. Володимирська, 68  
Київ 01601

e-mail: [ufj\\_nuft@meta.ua](mailto:ufj_nuft@meta.ua)

Scientific Council of the National  
University of Food Technologies  
recommends the Journal for printing.  
Protocol № 5, 27.12.2018

Рекомендовано вченою радою  
Національного університету  
харчових технологій.  
Протокол № 5 від 27.12.2018.

© NUFT, 2018

© НУХТ, 2018

**Ukrainian Food Journal** publishes original research articles, short communications, scientific news in the related fields and also literature reviews.

**Topics coverage:**

Food engineering	Food nanotechnologies
Food chemistry	Food processing
Food microbiology	Economics and management in food industry
Physical property of food	Automation of food processes
Food quality and safety	Food packaging

**Periodicity** of the journal – 4 issues per year.

**Reviewing a Manuscript for Publication.** All scientific articles submitted for publication in “Ukrainian Food Journal” are double-blind peer-reviewed by at least two academics appointed by the Editors' Board: one from the Editorial Board and one, not affiliated to the Board and/or the Publisher.

**Copyright.** Authors submitting articles for publication are expected to provide an electronic statement confirming that their work is not an infringement of any existing copyright and will not indemnify the publisher against any breach of legislation and/or international standards in academic publishing. For the ease of dissemination all papers and other contributions become the legal copyright of the publisher unless agreed otherwise.

**Academic ethics policy.** The Editorial Board of "Ukrainian Food Journal" strictly follows all internationally acknowledged rules and regulations on academic publishing and academic ethics. For more details on this see: Miguel Roig (2003, 2006) "Avoiding plagiarism, self-plagiarism, and other questionable writing practices. A guide to ethical writing". The Editorial Board suggests all potential contributors of the journal, reviewers and readers to dully follow this guidance in order to avoid misconceptions.

For a **Full guide for All Authors** please visit our website:

**<http://ufj.ho.ua>**

**International Editorial Board**

**Editor-in-Chief:**

**Valerii Mank**, Dr., Prof., *National University of Food Technologies, Ukraine*

**Members of Editorial board:**

**Lelieveld Huub**, Dr., *Global Harmonization Initiative Association, The Netherlands*

**Mark Shamtsyan**, Dr., As. Prof., *Black Sea Association of Food Science and Technology, Romania*

**Pascal Dupeux**, Dr., *University Claude Bernard Lion 1, France*

**Popovici Cristina**, Dr., As. Prof., *Technical University of Moldova*

**Semih Otles**, Dr., Prof., *Ege University, Turkey*

**Sonia Amariei**, Dr., Prof., *University "Ștefan cel Mare" of Suceava, Romania*

**Stefan Stefanov**, Dr., Prof., *University of Food Technologies, Bulgaria*

**Tetiana Pyrog**, Dr., Prof., *National University of Food Technologies, Ukraine*

**Tomasz Bernat**, Dr., Prof., *Szczecin University, Poland*

**Valerii Myronchuk**, Dr., Prof., *National University for Food Technologies, Ukraine*

**Viktor Stabnikov**, Dr., As. Prof., *National University for Food Technologies, Ukraine*

**Virginija Jureniene**, Dr., Prof., *Vilnius University, Lithuania*

**Vladimir Grudanov**, Dr., Prof., *Belarusian State Agrarian Technical University*

**Volodymyr Ivanov**, Dr., Prof., *Iowa State University, USA*

**Yordanka Stefanova**, Dr., *University of Plovdiv "Paisii Hilendarski", Bulgaria*

**Yuliya Dzyazko**, Dr., Prof., *Institute of General and Inorganic Chemistry «Vernadskii» of National Academy of Sciences of Ukraine*

**Yurii Bilan**, Dr., As. Prof., *Szczecin University, Poland*

**Managing Editor:**

**Oleksii Gubenia**, Dr., As. Prof., *National University of Food Technologies, Ukraine*

## Contents

<b>Food Technology</b> .....	563
<i>Vladimir Litvyak</i> Size and morphological features of native starch granules of different botanical origin.....	563
<i>Stanko Stankov, Hafize Fidan, Tanya Ivanova, Albena Stoyanova, Stanka Damyanova, Mykola Desyk</i> Chemical composition and application of flowers of false acacia ( <i>Robinia pseudoacacia</i> L.).....	577
<i>Yevgen Kharchenko, Andrii Sharan, Valentyn Chornyi, Olena Yeremeeva</i> Effect of technological properties of pea seeds and processing modes on efficiency of its dehulling.....	589
<i>Nina Bogdan</i> Biotechnological parameters determination for cultivation of lactic acid bacteria from goat milk.....	605
<i>Vira Obolkina, Olena Kokhan, Ivanna Synii, Iryna Krapyvnytska</i> Characteristics of changes of the chemical composition of cranberry marsh in the process of obtaining puree.....	615
<i>Sergey Gubsky, Maksym Labazov, Olga Samokhvalova, Nataliya Grevtseva, Olena Gorodyska</i> Optimization of extraction parameters of phenolic antioxidants from defatted grape seeds flour by response surface methodology.....	627
<i>Büşra Çakaloğlu, Vasfiye Hazal Özyurt, Semih Ötleş</i> Cold press in oil extraction. A review.....	640
<i>Oleg Kuzmin, Valentyna Zubkova, Tatiana Shendrik, Yurii Korenets, Anton Kuzmin, Pavlo Bilenkyi</i> Study of internal mechanisms for establishment of the equilibrium state of water-alcohol mixtures in vodka technology.....	655
<i>Ivan Dimov, Nadezhda Petkova, Gjore Nakov, Ira Taneva, Ivan Ivanov, Viktorija Stamatovska</i> Improvement of antioxidant potential of wheat flours and breads by addition of medicinal plants.....	671

<i>Maliheh Zarifpoor, Vahid Hakimzadeh</i> Investigating of artificial neural network potential to predict the properties of refined raw sugar beet juice by electrocoagulation process.....	682
<i>Natalia Frolova, Anatoly Ukrayinets</i> Development of methods of production in natural aromatic production.....	692
<i>Iryna Tsykhanovska, Victoria Evlash, Oleksandr Oleksandrov, Tetiana Gontar</i> Mechanism of fat-binding and fat-contenting of the nanoparticles of a food supplement on the basis of double oxide of two- and trivalent iron.....	702
<i>Marin Marinov, Mladen Naydenov, Rumyana Prodanova</i> Antimicrobial properties of two naphthopyrandione derivatives with cycloalkanespirohydantoin towards some phytopathogenic and beneficial microorganisms.....	716
<b>Processes and Equipment.....</b>	<b>726</b>
<i>Liudmyla Kryvoplias-Volodina, Oleksandr Gavva, Sergii Volodin, Taras Hnativ</i> Dynamics of mechatronic function modules drives of flow technological lines in food production.....	726
<i>Natalya Dunayevska, Yaroslav Zasiadko, Taras Shchudlo</i> Thermal destruction kinetics of coal and solid biomass mixtures.....	738
<i>Volodymyr Polupan, Victor Sidletskyi</i> Genetic algorithm usage for optimization of saturator operation.....	754
<b>Abstracts.....</b>	<b>763</b>
<b>Instructions for authors.....</b>	<b>776</b>
<b>Ukrainian Food Journal in 2018. Statistics.....</b>	<b>782</b>
<b>Contents of Volume 7 (Year 2018) .....</b>	<b>783</b>

## Dynamics of mechatronic function modules drives of flow technological lines in food production

Liudmyla Kryvopliias-Volodina, Oleksandr Gavva,  
Sergii Volodin, Taras Hnativ

National University of Food Technologies, Kyiv, Ukraine

---

### Abstract

---

#### Keywords:

Functional  
Module  
Packing  
Electro-pneumatic  
Actuator  
Accuracy

---

#### Article history:

Received 14.01.2018  
Received in revised  
form 22.05.2018  
Accepted 27.12.2018

---

#### Corresponding author:

Liudmyla  
Kryvopliias-Volodina  
E-mail:  
krivoplyas-volodina@  
ukr.net

---

DOI: 10.24263/2304-  
974X-2018-7-4-16

---

**Introduction.** The tasks were considered, which are related to the working bodies for the artificial food products movement according to the specified movement law and their positioning in the intermediate positions of the kinematic cycle.

**Materials and methods.** The actuators dynamics characteristics and control system of power part of positional electro-pneumatic actuators were researched. The methods of mathematical and computer modeling, and methods of solving ordinary differential equations and partial differential equations and method of correlation analysis were used.

**Results and discussion.** The analytical dependences for determining the kinematic parameters of the artificial product movement with the mechanism of collision, which is based on the pneumatic actuator, are obtained. The dynamical model of the actuator is mathematically tested and the movement law of the collision mechanism, which is approximated to the optimal speed, is obtained. To analyze the loading process of the working link of the positional actuator, the model of a generalized control system is used, which is limited by the one full cycle of operation of the functional mechatronic module of the packing machine. Such a model allows to describe the overload process, both in the case of full and partial filling of the working cycle. This is important when packing products in different geometric shapes of consumer packaging, which is typical of modern packaging machines. The simulation model of the actuator is theoretically substantiated and confirmed, which has a number of advantages, unlike the existing structures of positional drives in packaging machines. Calculated difference, during mathematical modeling, of the value of the working time of the output stage of the functional mechatronic module for the processing of the kinematic cycle of the operation of the packaging machine was for the various input parameters of the limit to 7%. The results of the mathematical modeling of dynamics for a positional pneumatic actuator, with the condition of changing the cross section of the exhaust hole, gave the opportunity to obtain the kinematic characteristics of the drive.

**Conclusions.** The results of mathematical modeling for positional pneumatic actuators with the condition of changing the section of the exhaust hole allowed to track all the kinematic characteristics of the actuator.

## Introduction

In recent years, a rather complicated process of optimal control of actuators of technological equipment for food production has been studied by many authors [1-4]. The authors took the various assumptions in order to simplify the mathematical description of the work of tracking and positional actuators [3, 4]. For a long time, this approach was justified, but over time, the productivity of mechatronic functional modules as part of technological equipment has increased significantly. In this connection, many control models of positional actuators with rational kinematic and dynamic parameters have become unacceptable for practical use [19]. Therefore, modulation of the moving process of artificial products by pusher on the basis of a position pneumatic actuator taking into account the real boundary conditions, as well as dynamic processes in the pneumocylinder, is relevant.

The main ways of packing artificial products in polymer films are revealed: the placement of the product in a pre-made package and fastening it with clips; the placement of the product in the sleeve, which is formed from roll packaging material; the placement of the product between two films and the formation of a package with four seams; the wrapping of the product with a polymeric film [8].

The analysis of the existing equipment for the packaging of artificial and small artificial foods, showed the priority of using polymeric packaging materials for a number of economic, environmental and protective parameters [5–7]. There are modules with linear displacement actuators in the composition of the collision mechanisms in the studied packaging machines (PMs), the most common mechatronic functional modules (MFMs) feeding the food product to the packaging area. The main ways of packing artificial products in polymer films are: placing the product in a pre-made package and fastening it with clips; placement of the product in the sleeve, formed from roll packaging material; placement of the product between two films and the formation of a package with four seams; wrapping the product with a polymeric film [8]. FMM layouts, which are using for the packaging of artificial and small artificial products, use commonly-designed functional devices (FDs) with pneumatic or electro-pneumatic actuators for pushing products [9,10]. It should be noted that in some cases, technological operations in packaging machines (movement of artificial products, the formation of a layer of artificial products, delivery of the package) carry out by using a pneumatic actuator [11]. It does not allow using of the single piston motion law when moving artificial products due to their different physical and mechanical properties. The strikes, which arise in the final position in the movement of artificial products, cause loss of their product appearance or the destruction of group units [12]. First of all, it is necessary to take into account, the possibility of practical implementation of this law by a pneumatic actuator, what means the possibility of ensuring a smooth change of all its parameters, when choosing the law of moving an artificial product [13].

The criterion, characterizing the operations of forming the structural elements of the package, can be the law of motion, selected by the condition of the required productivity, which is the most common in MFM packaging machines. It is connected with the work of packing machines, which have their own productivity, and locates at the earlier stages of the technological chain [14,15].

The *aim* is expanding the functionality of food packaging equipment provides the searching for ways to improve the drives of the functional mechatronic modules.

The *tasks* of the study:

- the modeling of piston movement law of the pneumocylinder with an initial difference in air pressure, approximating to the optimal speed. In this case, the loads movement on the fixed flat is considered a collision mechanism with a positional pneumatic actuator.



- using the mathematical modeling to study the cases of smoothing the acceleration function at the moment of disengagement of the driving force, which allows to change smoothly the working parameters of the positional pneumatic actuator.
- creation of the simulation model of the positional actuator, with taking into account the cases of functions smoothing of the of the analogue of speed and analogue of acceleration.
- description of the method of choosing the initial movement stage (in the coordinate  $x$ ), with taking into account the possible reduction of the actuating mechanism productivity.
- the study of optimal kinematic parameters of the packaging process of artificial food products in packaging machines.
- the development of the mathematical analysis method of the positional electro-pneumatic actuator for working out the modes of operation of the different functional mechatronic modules in a packing machine for artificial food products of the horizontal type.

In addition, it is necessary to set the value of the initial stage of the movement ( $x$  coordinate), choosing it in such a way that the initial stage does not have a significant effect on the productivity reduction of the executive mechanism. According to the author, the initial stage should not exceed 10% of the total displacement time of the piston (product), which allows the practical realization of a given law of motion without major errors.

## Materials and methods

### Materials

The materials were chosen the positional actuators of packaging machines. The aim of the study was chosen the dynamics of electro-pneumatic positional actuators. The analysis of the working bodies motion laws of the initial kinematic link of the collision mechanisms was carried out for the technological schemes of the MFM movement of artificial products and the group (layer) of artificial products into the formed sleeve of the packaging material.

### MFM formation characteristics of artificial products packaging

The operations of forming the artificial products packaging are connected to the work of the MFM elements according to the laws of motion, which determine the required productivity of the packaging machine. As an researched positional actuator, for the given layout of Figure 1, MFM was chosen on the basis on pneumo actuator of positional type.

At Figure 1b there is shown with use of the graphs the generalized characteristics of displacement, speed, acceleration for the working output of the MFM. The mathematically illustrated graphs are described in the work [16]. According to the recommendations, we accept the initial conditions for the study of the technical system of the MFM (Figure 1a):

- The collision system, provided by the FMM, works according to the linear modified [17] law;
- The stage of acceleration is limited by the conditions  $0 < t < 0,25T$ :


$$x = 2x_0 \left(\frac{t}{T}\right)^2; \dot{x} = 4x_0 \frac{t}{T^2}; \ddot{x} = \frac{4x_0}{T^2}. \quad (1)$$

Deceleration:

$$0,75T < t < T; x = \frac{4x_0 t}{T} - x - 2x_0 \left(\frac{t}{T}\right)^2 \\ \dot{x} = \frac{4x_0}{T} \left(1 - \frac{t}{T}\right); \ddot{x} = -\frac{4x_0}{T^2}.$$

Constant motion:  $0,25T < t < 0,75T$ ;

$$x = \dot{x}t; \dot{x} = \frac{x_0}{T}; \ddot{x} = \text{const}; \quad (2) \\ \ddot{x} = \frac{6x_0}{T^2} \left(1 - \frac{2t}{T}\right).$$

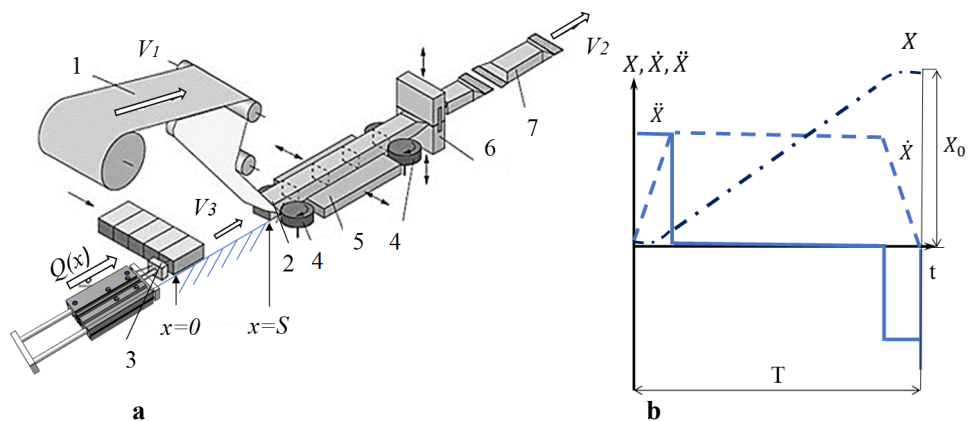

**Figure 1. Technological scheme of PM for packing in a three-seam package with the work schedule of the output kinematic link MFM:**

1 – FMM supply of packaging material; 2 – FD formation of the semi-sleeve; 3 – FD package formation; 4 – artificial product based on corex; 5 – MFM the formation of the longitudinal seam; 6 – MFM the formation of the longitudinal seams; 7 – FMM forming of welding transverse seams; 8 – FD cutting off surplus shrinkable packaging material; 9 – transport system of withdrawal of finished packaging; 10 – MFM moving products into the sleeve.

The given descriptions of the movement laws of the technological machines [16] of working bodies do not allow us to describe in detail the change in the kinematic characteristics of the working bodies in the arrangement with the electro-pneumatic actuator. Therefore, taking into account Figure 1 (b) and work [16,18], we can formulate research tasks with additional parameters. For such parameters we accept the processes of changing the pressure in the power part of the positional pneumatic actuator. MFM research with taking into account the inertial processes of the power part of the electro-pneumatic actuator is due to the need to supplement information on the operation of the executive mechanisms of automatic machine [16], in particular the packaging machine for the packaging of artificial food products. Well-formed structure of the control system, which also needs to be taken into account in the studies, allows to coordinate the work of all the components of the MFM.

### Research methods

Methods of mathematical and computer modeling, methods of solving ordinary differential equations and differential equations in partial derivatives were used to study the dynamics of compressed air in the cavities of the pneumocylinder. In the study of the layout of MFM packaging machines, the theory of automated control of electropneumatic position drives is used.

### Results and discussion

The first stage requires the analysis of classical methods for describing the work of the MFM output working links. The graph (Figure 1, B) show the 3 stages of changes in kinematic parameters of the output link. At the real technical systems, according as that the control module is taken into account, the similar graphs can be divided into 4 stages:

- the time of the preparatory period of the forward stroke  $t_{I}$ ;
- the time of the working stroke of the piston  $t_{II}$ ;

- the time of the preparatory period of the reverse stroke  $t_{III}$ , which is connected with the time of receipt of the control signal for the operation of the pneumocyclor rod;
- the time of piston motion in the reverse direction  $t_{IV}$  is determined by a common solution of equations (3) – (5) with the help of the ECM.

The second stage consists of studying the movement of the stem of pneumocylinder, it is the MFM output links. We have chosen the law of the stem movement due to the necessary productivity. This is a special case of the optimal speed of the process of load movement, which allows to achieve maximum productivity of the actuator.

In the implementation of the studied of movement law of the working output link of the MFM (Figure 2), the inertia of the positional electro-pneumatic actuator control system is taken into account. The structure of control of the system (Figure 3) is analyzed, with the condition – to ensure the presence of the driving force  $Q$  (acceleration  $\ddot{x}$ ) in the initial stage of motion.

- To compile a mathematical model of the MFM output link, the assumptions are made:
- taking into account the external force on the piston rod until the resistive force  $Q(x)$ , (Figure 2), does not increase to the value corresponding to the required acceleration  $\ddot{x}$ .
  - the change in the value of acceleration of the piston and the rod of the pneumocylinder from the maximum to the minimum value is considered at the moment of disengagement of the driving force. It requires an instantaneous increase in pressure in the exhaust flat.

The classic graphs of the movement laws of the working links (Figure 1b) do not take into account the transitional stages of the work of the technical system as part of the control module. Therefore, we have chosen to compile a mathematical model of the work of the initial working link, it is the combined law of the movement of the rod into the electro-pneumatic positional actuator. The graph (Figure 2) describes the working and idle movement of the piston rod in the operation of control elements, it is electromagnetic relays of the control system, the scheme of which is shown on (Figure 4).

Thus, the solution of the problem is reduced to the solution of the optimization problem with initial conditions, that are not equal to zero, followed by smoothing the discontinuous function at the time of switching off the driving force. The movement of the piston of the positional pneumatic actuator (Figure 2) consists of four stages:

Stage I is initial. The using a control signal from electromagnetic relays of an electropneumatic distributor – and the driving force increases ( $Q \leq Q(x) \leq Q_{max}$ ). The movement law of a piston pneumoscylinder acquires a parabolic form. The work of the working link begins.


Stage II is intensive acceleration. It finishes with the disappearance of the signal of the control electromagnet (first solenoid). The driving force is constant  $Q_{max} = const$ . The stage condition:  $Q_{max}$ - is the maximum driving force, developing by pusher, does not cause deformation of the artificial product.

Stage III is transitional. The using of the electromagnetic relay of the electropneumatic distributor (second solenoid). Driving force decreases ( $Q_{max} \geq Q(x) \geq Q$ ) as a result of the resistance of the compressed air of the rod chamber of the pneumocyclor.

Stage IV is characterized by a reverse movement of the rod, which is under the influence of intense deceleration. The stage is completed when the control signal from the second solenoid is turned off. The driving force is zero ( $Q = 0$ ). It is necessary to ensure the integrity of the load from the pusher. The boundary conditions in this problem are as follows:

$$t = 0; \ddot{x} = 0; \dot{x} = 0; x = 0; \ddot{x} = \ddot{x}_{IV}; \dot{x} = 0; x = S.$$

where  $S$  is the value of the movement of cargo from the initial position to the final;  $\ddot{x}_{IV}$  is the value of the load acceleration at the stage of intense deceleration.

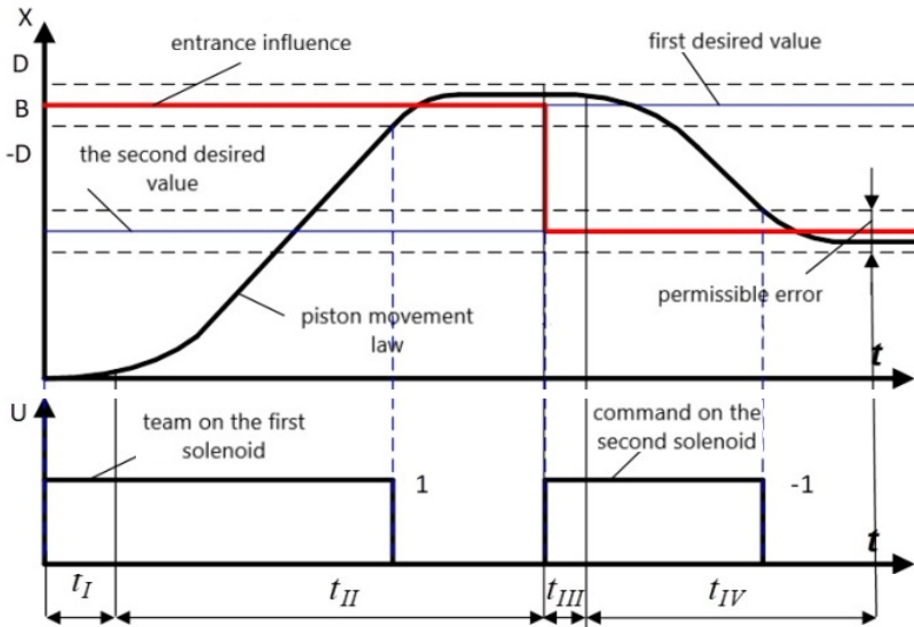

**Figure 2. Combined law of motion of the driving link in the MFM positional actuator with taking into account the receipt of control signals from electromagnetic relays of the electropneumatic distributor**

According to the equation (4.1), there is no time in final conditions for which the load is moved. This is explained by the fact that during a four-stage mode, the time of movement is determined during the task execution. The variable quantities are set depending on the parameter  $x$ , the equation of the piston motion of the pneumatic actuator of two-way action will have the form:

$$m\ddot{x} = p_1(x)F_1 - p_2(x)F_2 - P(x) \quad (3)$$

where  $m$  – the mass of the product;  $p_1, p_2$  – pressure of the piston and stomach cavity,  $F_{1,2}$  – square of the piston pneumocycline.

We obtain expressions, which characterize the change in pressure as a function of displacement, respectively, for the working and exhaust cavities

$$\frac{dp_1}{dx} = \frac{k}{x_{01}+x} \left[ \frac{f_1^e K p_m \sqrt{RT_m}}{F_1} \varphi(\delta_1) \cdot \frac{1}{x} - P_1 \right] \quad (4)$$

$$\frac{dp_2}{dx} = \frac{k}{S+x_{02}-x} \left[ \frac{-(f_2^e K p_2^{\frac{3k-1}{2k}} \sqrt{RT_m})}{F_2 p_m^{(k-1)/2k}} \cdot \frac{1}{x} \varphi\left(\frac{\delta_a}{\delta_2}\right) + P_2 \right] \quad (5)$$

where  $k$  – air adiabatic coefficient,  $x_{01}, x_{02}$  – initial and final coordinate of the piston movement,  $R$  – gas constant air,  $T_m$  – air temperature,  $p_m$  – pressure of the pneumatic line;  $\varphi(\delta_1)$  – is cost characteristic of the section.

According equation (5), the pressure in the exhaust cavity is:

$$P_2(x) = (P_1(x)F_1 - m\ddot{x} - P(x))/F_2 \quad (6)$$


After differentiating the  $P_2(x)$  function by the variable  $x$ , we have:

$$\dot{P}_2(x) = (\dot{P}_1(x)F_1 - m\ddot{x} - \dot{m}\ddot{x} - \dot{P}(x))/F_2 \quad (7)$$

According to equation (4.4) the effective area of the exhaust hole is

$$f_2^e = \frac{[P_2 - \frac{dp}{dx} \frac{S+x_{02}-x}{k}] \dot{x} F_2 p_m^{(k-1)/2k}}{k p_2^{(3k-1)/2k} \sqrt{RT_m} \varphi \left( \frac{\delta_a}{\delta_2} \right)} \quad (8)$$

Thus, having the equations (3-8), which describe the parameters of the positional pneumatic drive depending on the variable  $x$ , we can proceed to the definition of the equations characterizing the movement of the moving load on a fixed flat (Figure 3).

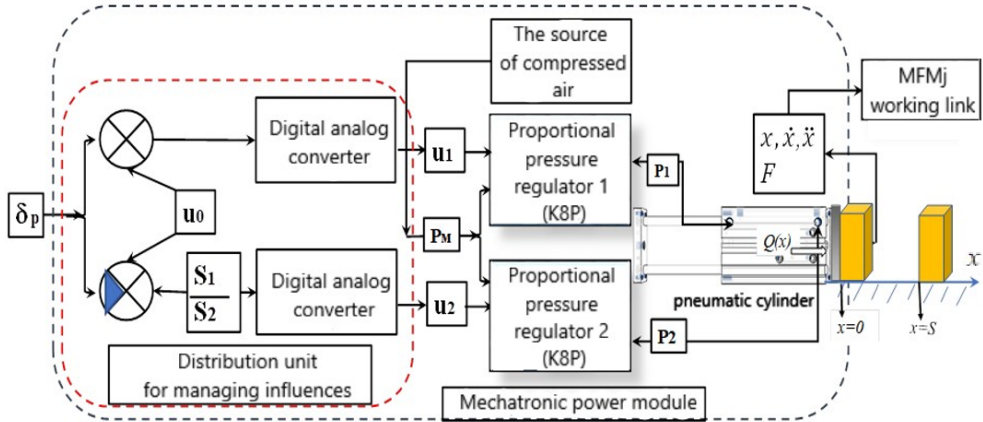

**Figure 3. The generalized scheme of the load movement on a fixed flat in the layout with the structural scheme of tracking the piston movement of the pneumocylinder**

Figure 3 shows the circuit diagram of the electro-pneumatic positioning actuators of the packing machine. Actuators are built by combining into a single module a pneumocylinder, reliable and inexpensive serial electro-pneumatic distributors of discrete action, precision piston position sensors and a controller that implements the algorithm of digital relay control.

To stop the object at different points, feedback from the continuous action sensor is used that measures the current state of the piston relative to the base value. The pneumomechanical subsystem consists of a piston with a rod, a mechanical control object and equivalent pneumatic springs in the cavities of the pneumocylinder. The control effects,  $u_1$  and  $u_2$ , are on the two pressure control modules, which are implemented programmatically by using the control distribution control block. To achieve high speed drive and obtain the maximum range of force control is advisable to provide a consistent change of effects  $u_1$  and  $u_2$  in accordance with the equation:

$$\begin{cases} u_1 = u_0 + \delta_p, \\ u_2 = (u_0 + \delta_0) \cdot \frac{S_1}{S_2}. \end{cases} \quad (9)$$

This equation is used the input action of the mechatronic FD  $\delta_p$  and the reference value  $u_0$ , which sets the pressure in the cavities of the pneumocylinder at zero input action, taking into account the difference in the piston area from the rod cavity  $S_1$  and the piston-free cavity  $S_2$ . The presence of a MFM with a positional actuator is a distinctive feature of the proposed new structure of the mechatronic FD.

Consider the law of movement of the leading link as a part of the mechatronic FD. It requires:

- to find the time  $T_{on}$  of load movement in the optimal speed of the two-stage mode to set the required value of  $x_{ik}$  of load movement at the first stage I in a four-stage mode;


- to determine the equations on the basis of the obtained value  $x_{jk}$ , describing the kinematic parameters of the moving load at first stage in the four-stage mode, and also the final conditions for this stage;
- to consider the load movement as a three-stage and to determine the shutdown time of the driving force and the total time of movement. In this case, the final coordinates for the stages I and III of the three-stage mode of motion coincide with the final coordinates for stages I and IV of the four-stage mode of movement;
- to determine the equations describing the load movement at II and IV stages, and then at III stage for a four-stage mode of motion.

This sequence of tasks is connected with determining the initial and final coordinates of the load movement for each stage and with the searching for integration constants.

The time  $T_{on}$  of the load movement at optimal speed in two-step mode (Figure 4, 8, a) is determined by the method [9].

$$T_{on} = \sqrt{\frac{2S}{gf(1-m_cgf/Q)}} \quad (10)$$

where  $S$  is value of load movement (piston stroke);  $m_c$  is load weight;  $f$  is the coefficient of friction between the bearing surface of the load and the displacement flat.

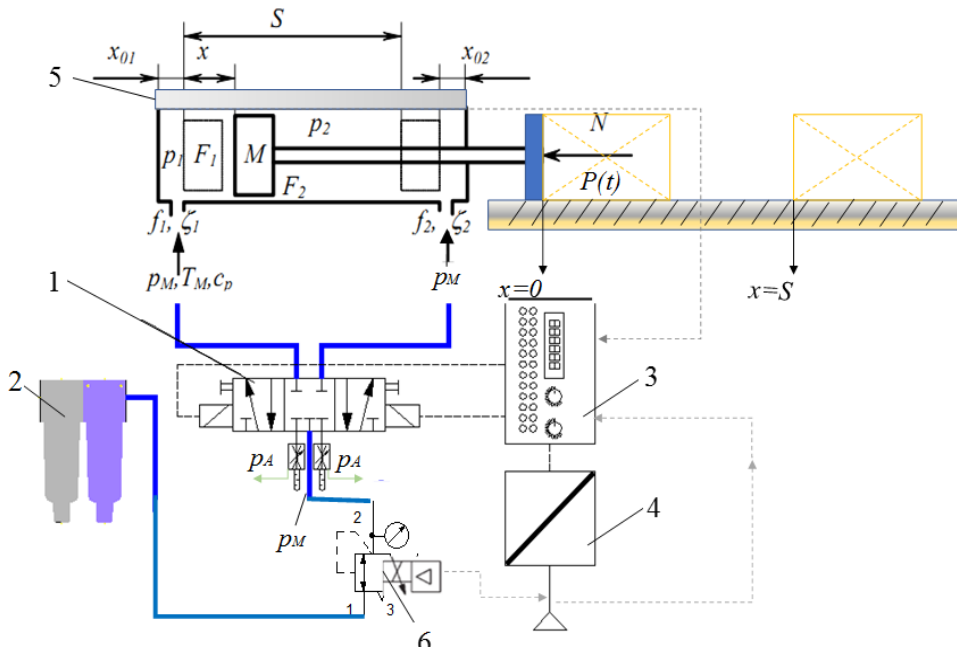

**Figure 4. The structured control scheme of the power part of the positional pneumatic actuator with dynamic load:**

- 1 – control divider 5/3 with closed lines in the central position, 2 – air preparation unit, 3 – controller, 4 – control signal converter of the automated control system.

In the Table 1, for ease of use, the equations, describing the kinematic parameters of a moving product (piston) in a four-stage mode, when  $T$  and  $Q_{max}$  are known.

The changing of parameters of the movement product process on a fixed flat and the operating parameters of the positional actuator when  $Q_{max} = 20$  H; weight of artificial


product  $m_c = 0.5$  kg;  $f = 0.3$ ;  $S = 0.2$  m;  $F_1 = 4.9 \cdot 10^{-4}$  m<sup>2</sup>;  $F_2 = 3.77 \cdot 10^{-4}$  m<sup>2</sup>;

$f_1$  is variable, depending on the diameter of the main pipeline;  $P_m = 5 \cdot 10^5$  Pa;  $m = m_{gr} + m_p = 0.5 + 1.5 = 2$  kg, where  $m_p = 1.5$  – the mass of moving parts of the pneumocylinder;  $P_{d.tr} = 20$  N – is the dynamic load of the pneumocylinder is shown in Figure 5.

Table 1

Calculation formulas for determining the kinematic parameters of the moving load by a collision mechanism with a pneumatic actuator in the implementation of the motion law approximating to the optimal velocity

Stage	Calculation formulas
I	<p>Initial conditions: <math>t = 0</math>; <math>x = 0</math>; <math>\dot{x} = 0</math>; <math>\ddot{x} = 0</math></p> $\ddot{x}_I = A_1 \cdot \sin(a_1 x), \quad a_1 = \frac{\pi}{2x_{I_k}}$ $A_1 = \ddot{x}_{II} \cdot \dot{x}_I = \sqrt{2 \cdot \frac{A_1}{a_1} \cdot (1 - \cos(a_1 \cdot x))}$ $t_1 = \int_0^{x_{I_k}} \frac{dx}{\sqrt{2 \frac{A_1}{a_1} \cdot (1 - \cos(a_1 \cdot x))}}$ <p>Final conditions: <math>t_{I_k} = t_I</math>; <math>\ddot{x}_{I_k} = \ddot{x}_{II}</math>; <math>\dot{x} = \dot{x}_{I_k}</math>; <math>x = x_{I_k}</math>.</p>
II	<p>Initial conditions: <math>t_{IIH} = t_1</math>; <math>\ddot{x}_{IIH} = \ddot{x}_{II}</math>; <math>\dot{x}_{IIH} = \dot{x}_{I_k}</math>; <math>x_{IIH} = x_{I_k}</math>.</p> $\ddot{x}_{II} = \frac{Q}{m} - g \cdot f; \quad \dot{x}_{II} = \sqrt{\dot{x}_{IIH}^2 + 2 \cdot \left(\frac{Q}{m} - g \cdot f\right) \cdot (x - x_{IIH})};$ $t_{II} = \frac{\dot{x}_{IIk} - \dot{x}_{IIH}}{\frac{Q}{m_c} - g \cdot f}$ <p>Final conditions: <math>t_{IIk} = t_I + t_I</math>; <math>\ddot{x}_{IIk} = \ddot{x}_{II}</math>; <math>\dot{x} = \dot{x}_{IIk}</math>; <math>x = x_{IIk}</math>.</p>
III	<p>Initial conditions: <math>t_{IIIH} = t_{IIk}</math>; <math>\ddot{x}_{IIIH} = \ddot{x}_{IIk}</math>; <math>\dot{x}_{IIIH} = \dot{x}_{IIk}</math>; <math>x_{IIIH} = x_{IIk}</math></p> $\ddot{x}_{III} = B_3 + A_3 \cdot \sin(q_3 \cdot x + b_3)$ $A_3 = \frac{ \ddot{x}_{II}  +  \ddot{x}_{IV} }{2}; \quad B_3 = \frac{ \ddot{x}_{II}  +  \ddot{x}_{IV} }{2}; \quad b_3 = \pi - a_3 \cdot x_T$ $a_3 = \frac{0.45 \cdot (p_{2n} + p_{2k}) \cdot k \cdot F_2 - \dot{p}_1 \cdot F_1 (s + x_{02} - x)}{(s + x_{02} - x) \cdot m \cdot A_3}$ $\dot{x}_{III} = \sqrt{2 \cdot (B_3 (x - x_{IIIH}) - \frac{A_3}{a_3} \cdot \cos(a_3 \cdot x + b_3)) + \frac{x_{IIIH}^2}{2}}$ $t_{III} = \int_{x_{3k}}^{x_{3H}} \frac{dx}{2 \cdot (B_3 \cdot (x - x_{IIIH}) - \frac{A_3}{a_3} \cdot \cos(a_3 \cdot x + b_3)) + \frac{\dot{x}_{IIIH}^2}{2}}$ <p>Final conditions: <math>t_{IIIk} = t_I + t_{II} + t_{III}</math>; <math>\ddot{x}_{IIIk} = \ddot{x}_{IV}</math>; <math>\dot{x} = \dot{x}_{IIIk}</math>; <math>x = x_{IIIk}</math>.</p>
IV	<p>Initial conditions: <math>t_{IVH} = t_{IIIk}</math>; <math>\ddot{x}_{IVH} = \ddot{x}_{IV}</math>; <math>\dot{x}_{IVH} = \dot{x}_{IIIk}</math>; <math>x_{IVH} = x_{IIIk}</math></p> $\ddot{x}_{IV} = -g \cdot f; \quad \dot{x}_{IV} = \sqrt{2 \cdot g \cdot f (s - x)}; \quad t_{IV} = \dot{x}_{IVH} / g \cdot f$ <p>Final conditions: <math>t_{IVk} = T_r</math>; <math>\ddot{x}_{IVk} = \ddot{x}_{IV}</math>; <math>\dot{x}_{IVk} = 0</math>; <math>x = s</math></p>

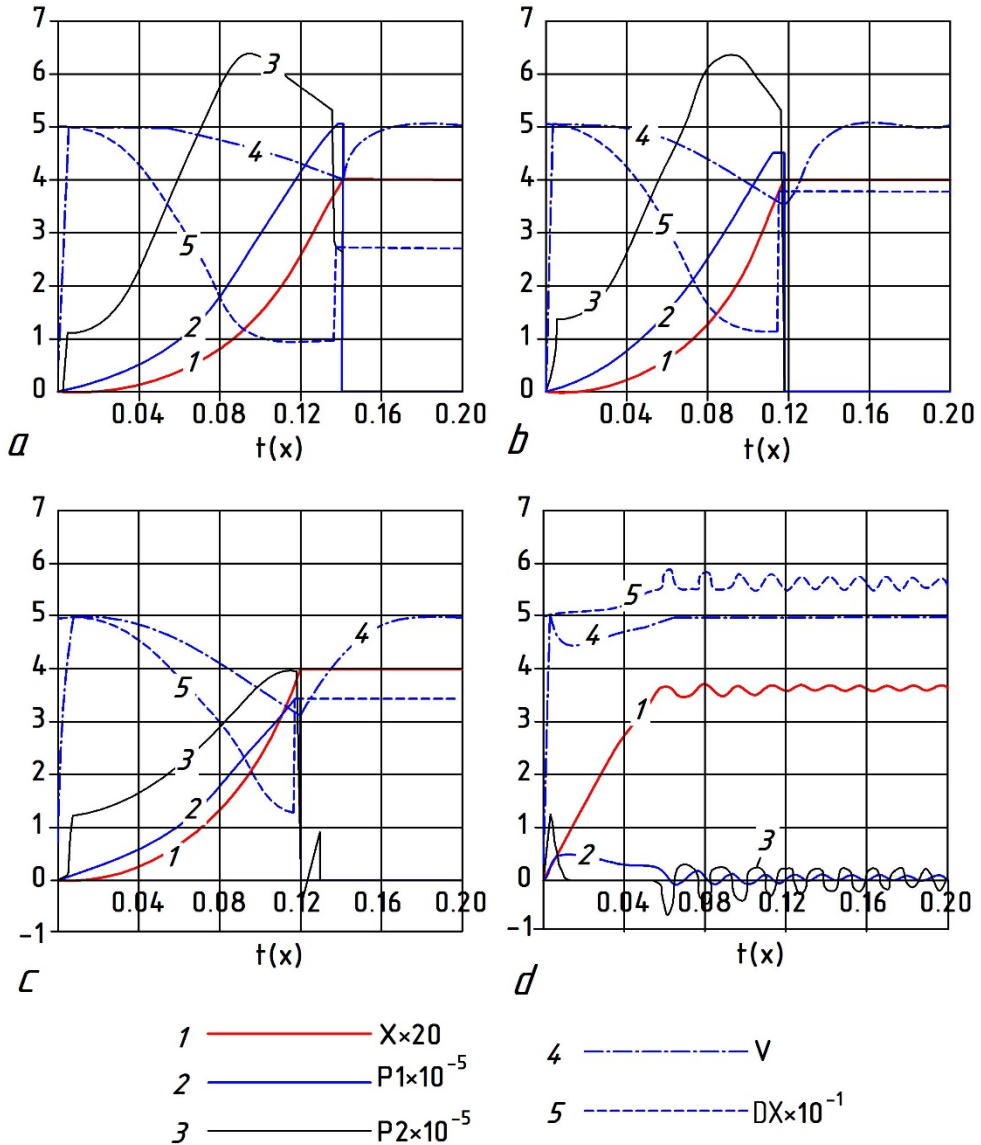

**Figure 5. The generalized results of the modeling of the kinematic load and the pressure variation of the working position pneumatic actuator (without taking into account  $h$  – the coefficient of viscous friction of the piston in the pneumatic cylinder) with the minimization of the movement time of the artificial product:**

- a – the diameter of the pipeline is 10mm,  $f_l^e = 7.854 \cdot 10^{-5} \text{ m}^2$ ,
- b – the diameter of the pipeline is 8 mm,  $f_l^e = 5.027 \cdot 10^{-5} \text{ m}^2$ ,
- c – the diameter of the pipeline is 6mm,  $f_l^e = 2.827 \cdot 10^{-5} \text{ m}^2$ ,
- d – the diameter of the pipeline is 4mm,  $f_l^e = 1.257 \cdot 10^{-5} \text{ m}^2$ ;

$x$  – the coordinate of the piston movement (m);  $V$  – the speed of piston movement (m/s);  $DX$  – the acceleration of piston movement;  $P_1$  – pressure in the piston chamber of the pneumocylinder (Pa);  $P_2$  – the pressure in the rod end of the pneumocylinder (Pa);  $t$  – time movement (s).



Thus the resultant of all resistance forces at I, II and III stages of the kinematic links movement:

$$P(x) = P_{friction\ force} + (m_c + m_n)\ddot{x} + m_c g f + p_a(F_1 - F_2) \quad (11)$$

The resultant of all resistance forces at stage IV:

$$P(x) = P_{friction\ force} + m_n\ddot{x} + p_a(F_1 - F_2) \quad (12)$$

Figure 5 shows the graphs of the dependence of kinematic parameters from the time of movement of an artificial product in the implemented mode and the pressure change in the working cavities of the pneumocylinder (the power part of the position actuator).

## Conclusion

The output link movement of the experimental MFM, the pneumo-cylinder rod of the electro-pneumatic positional actuator are implemented and mathematically described. The conditions of the initial difference of air pressure are taken into account. The mathematical description of the rod movement law, which is optimal for the speed of action, is obtained. In the obtained results, it is clearly observed that when the exhaust section of the working cylinder of the positional pneumatic actuator is narrowed, the value of the inertial component at stage 4 (deceleration) increases. In addition, given the complexity of the working environment, – compressed air – it is necessary to apply the additional parameters: viscous friction coefficients of the working kinematic pair of piston-rod, resistance coefficients in the exhaust section in the implementation of the fourth stage of motion.

The movement of products on a fixed reference flat by a mechanism of collision with an electro-pneumatic positional pneumatic actuator with consideration of the control system is researched.

The proposed analytical dependences allow:

- to set the working body the law of translational motion, approximating to the optimal speed, without exceeding the maximum permissible dynamic load for the moving load;
- to move the artificial product from the initial position to the final in the shortest possible time for the pneumatic actuator;
- to analyze the existing structures of operating actuators with pneumatic actuators.

## References

1. Doherty J., McGinn T. (1988), Automated hybrid package sealing system, *Electronic Manufacturing Technology Symposium*, Fifth IEEE/CHMT International, pp. 183–187.
2. Bogomolov V., Kramskoy A., Kudryavtsev I., Pyatak A., Bondarenko S., Murinets-Markevich B., Plammer M. (2003), K voprosu o vyichislenii pokazatelya politropiyi dlya porshneвого pnevmaticheskogo dvigatelya, *Vestnik HNADU i Severo-Vostochnogo Nauchnogo Tsentra Transportnoy Akademii Ukrainy*, 21, pp. 14–17.
3. Krivts I., Krejnin G. (2006), *Pneumatic Actuating Systems for Automatic Equipment: Structure and Design*, CRC Press Taylor & Francis Group, Boca Raton.
4. Ilyuhin Yu. (2009), *Pozitsionnyie i sledyaschie elektropnevmaticheskie privodyi. Mehatronnyie resheniya Kamotstsi*.
5. Galnaitytė A., Kriščiukaitienė I., Baležentis T., Namiotko V. (2017), Evaluation of Technological, Economic and Social Indicators for Different Farming Practices in

- Lithuania, *Economics and Sociology*, 10(4), pp. 189–202, DOI:10.14254/2071-789X.2017/10-4/15
6. Uebing M., Vaughan, N. (1997), On linear dynamic modelling of a pneumatic servosystem, *Proceedings of the Fifth Scandinavian International Conference on Fluid Power SICFP'97*, vol. 2, Linköping.
  7. Virvalo T. (2016), Comparing different controllers of electropneumatic position servo, *Proceedings of the Third JHPS International Symposium*, Yokohama.
  8. Smaoui M., Brun X., Thomasset D. (2006), *A study on tracking position control of an electro pneumatic system using backstepping design*, Control Eng Pract.
  9. Ahn K., Yokota S. (2005), Intelligent switching control of pneumatic actuator using on/off solenoid valves, *Mechatron*, 15, pp. 683–702, DOI:10.1016/j.mechatronics.2005.01.001.
  10. Richard E., Hurmuzlu Y. (2015), A High Performance Pneumatic Force Actuator System, Part 2-Nonlinear Controller Design, *ASME J. Dyn. Syst., Meas., Control*, 122.
  11. Shu N., Bone G. (2002), High Steady Accuracy Pneumatic Servo Positioning System with PVA/PV Control and Friction Compensation, *Proceeding of the IEEE International Conference on Robotics & Automation*, Washington.
  12. Perez-Meneses J. (2003), Dynamic analysis of pneumatically driven mechanisms, *Department of Mechanical Engineering*, University of Guanajuato.
  13. Janiszowski K. (2005), Adaptation, modeling of dynamic drives and controller design in servomechanism pneumatic systems, *IEE Proceedings, on Control Theory and Applications*, 151.
  14. Janiszowski K., Kuczyński M. (2007), Fast prototyping approach in developing low air consumption pneumatic systems, *Mechatronics*, Springer.
  15. Kinyckiy Ya. (2008), *Problems and tests on theory of mechanisms and machines*, Naukova Dumka, Kyiv.
  16. Kinyckiy Ya. (2002), *Theory of mechanisms and machines*, Naukova Dumka, Kyiv.
  17. Czyżewski A., Smędzik-Ambroży K. (2015), Specialization and diversification of agricultural production in the light of sustainable development, *Journal of International Studies*, 8(2), pp. 63–73, DOI: 10.14254/2071-8330.2015/8-2/6
  18. Kinyckiy Ya., Kharzhevskiy V. (2006), *Analytical methods of analysis and synthesis of mechanisms*, KhNU, Khmelnytskyi.
  19. Harchenko A. (2008), Razrabotka elektropnevmaticheskikh sledyaschih privodov dlya transportnyh robotov na baze mehatronnyh komponentov, *Aktualnyie problemy zaschity i bezopasnosti: Trudy Odinnadtsatoy Vserossiyskoy nauchno-prakticheskoy konferentsii* (1–4 aprelya 2008 g.), Sankt-Prterburg.